

A

Case Docket No. PHN 17,061

THE COMMISSIONER OF PATENTS AND TRADEMARKS, Washington, D.C. 20231

Enclosed for filing is the patent application of Inventor(s):
CORNELIS A.M. JASPERS

For: COLOR SIGNAL MATRIX ADJUSTMENT

ENCLOSED ARE:

- ☒ Associate Power of Attorney;
- ☒ Information Disclosure Statement, Form PTO-1449 and copies of documents listed therein;
- ☐ Preliminary Amendment;
- ☒ Specification (6 Pages of Specification, Claims, & Abstract);
- ☒ Declaration and Power of Attorney:
(1 Pages of a ☐ fully executed ☒ unsigned Declaration);
- ☒ Drawing (1 sheets of ☐ informal ☒ formal sheets);
- ☒ Certified copy of EUROPEAN application Serial No. 98202727.8
- ☐ Other: ;
- ☐ Assignment to

FEE COMPUTATION

CLAIMS AS FILED				
FOR	NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE - 760.00
Total Claims	6 - 20 =	0	X \$18 =	0.00
Independent Claims	3 - 3 =	0	X \$78 =	0.00
Multiple Dependent Claims, if any			\$260 =	0.00
TOTAL FILING FEE				= \$760.00

Please charge Deposit Account No. 14-1270 in the amount of the total filing fee indicated above, plus any deficiencies. The Commissioner is also hereby authorized to charge any other fees which may be required, except the issue fee, or credit any overpayment to Account No. 14-1270.

☐ Amend the specification by inserting before the first line the sentence: --This is a continuation-in-part of application Serial No. , filed .--.

CERTIFICATE OF EXPRESS MAILING

Express Mail Mailing Label No. EL33554889545
Date of Deposit August 11, 1999
I hereby certify that this paper and/or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Josephine Cangelosi
Typed Name Josephine Cangelosi
Signature

Brian J. Wieghaus
Brian J. Wieghaus, Reg. 32,603
Attorney
(914) 333-9633
U.S. Philips Corporation
580 White Plains Road
Tarrytown, New York 10591
s:\wi\ml05wit0.cn0

Color signal matrix adjustment.

The invention relates to a method of and device for a color signal matrix adjustment, and to a color camera comprising such a color signal matrix adjustment device.

- 5 Every color sensor needs a correction of its given colors towards the EBU Red-Green-Blue primaries which are accustomed in worldwide television sets and PC monitors. For the color correction a matrix with nine variables is applied. The RGB color matrix serves in the following equation:

$$\begin{bmatrix} Ro \\ Go \\ Bo \end{bmatrix} = \begin{bmatrix} a11 & a12 & a13 \\ a21 & a22 & a23 \\ a31 & a32 & a33 \end{bmatrix} \times \begin{bmatrix} Ri \\ Gi \\ Bi \end{bmatrix}$$

- Herein, Ri, Gi, Bi are the input RGB signals of the image sensor, Ro, Go, Bo are the output RGB signals which are close to the EBU primaries or otherwise more desired (e.g. in that the picture just looks nicer) than the input RGB signals, and a11 ... a33 are the color signal matrix parameters, viz. a11 ... a13 for Red, a21...a23 for Green, and a31 ... a33 for Blue.

- If one of the color signal matrix parameters a11 ... a33 is changed to obtain a desired change in one output color, also the white reproduction will be changed as an undesired side-effect. This makes a manual adjustment of the output colors very difficult and time consuming.

- Besides the desired correction of RGB colors, commonly also the white point of the image generated by the sensor has to be corrected. The white reproduction depends on the RGB spectral power distribution of the sensor itself and of the color temperature of the scene illumination. That white reproduction has to be adjusted to D65 or close to D65 white of the EBU display standard. The white reproduction via the color signal matrix is represented by the sum of the matrix variables of each color:

$$\Sigma R = a11 + a12 + a13$$

$$\Sigma G = a21 + a22 + a23$$

25 $\Sigma B = a31 + a32 + a33$

It is however almost impossible to change the three selected matrix parameters of one color proportionally in order to achieve a desired white point.

US-A-5,402,182 discloses an automatic white balance controlling apparatus for controlling the white balance of an image screen by controlling the color signal level in accordance with an up-down counting result in a micro-computer.

It is, inter alia, an object of the invention to provide a very simple matrix adjustment. To this end, a first aspect of the invention provides a method and a device as defined by claims 1 and 5. A second aspect of the invention, defined by claim 6, provides a color camera comprising such a matrix adjustment device. Advantageous embodiments are defined in the dependent claims.

In a color signal matrix adjustment method in accordance with a primary aspect of the invention, only a single first color signal matrix related value is adjusted to obtain a desired color signal matrix adjustment, and at least two color signal matrix parameters other than the single first color signal matrix related value are automatically adapted in dependence upon the color signal matrix parameter adjustment.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

The drawing shows an embodiment of a color camera in accordance with the present invention.

In accordance with a preferred embodiment of the present invention, the desired white and RGB color adjustment can much easier be achieved with the aid of a RISC core (or any other kind of computing power) in the camera, and with the above-mentioned color signal matrix formulas.

A primary application of the invention relates to a color signal matrix adjustment with the aid of RISC core. There are four possibilities for adjusting the matrix to the desired colors. The selection of a possibility, and switching from one to another and back, depends on the way of adjustment and fine-tuning by the user.

1. The conventional method by changing one matrix parameter at a time.
2. Changing one matrix parameter at a time, but with maintenance of the white reproduction to a large extent in accordance with a first aspect of the present invention.
3. For white adjustment, three matrix parameters can be changed simultaneously.
- 5 4. For white amplitude adaptation, all nine matrix parameters can be changed proportionally to each other.

The first possibility needs of course no further explanation. The selected color as well as the white reproduction will change.

- 10 The second possibility, offering the maintenance of the white reproduction to a large extent by selecting first a Boolean B1 to distinguish it from the first possibility, uses the calculation power of a RISC core. If one matrix parameter of a color X is changed with a value $\pm\delta$, then all six matrix parameters not belonging to the selected color X (i.e. those in the two other rows), are multiplied by $(\Sigma X \pm \delta) / \Sigma X$, where ΣX corresponds with the selected Red, Green or Blue matrix row sums. After that new ΣR , ΣG and ΣB values are calculated. They will be proportional to the previous values before the adjustment, so the white reproduction will be maintained to a large extent. White is fully maintained if the ΣR , ΣG and ΣB values are equal to 1; a slight white shift occurs if the ΣR , ΣG and ΣB values differ from 1. However, this slight white shift can easily be corrected in accordance with the third possibility described
- 15 below.
- 20

In accordance with the third and fourth possibilities, the white reproduction is changed with maintenance of the ratio of the matrix parameters for each color.

- 25 The third possibility, indicated by a second Boolean B2, concerns the adjustment of the white reproduction with only one single parameter, again with the aid of a RISC core. If the white reproduction has to be changed, one of the ΣR , ΣG or ΣB matrix row sums is selected and changed. The RISC core takes care of a proportionally change of the corresponding matrix parameters. For example, if ΣR is increased by $\pm\delta$, then the matrix parameters a_{11} , a_{12} and a_{13} are each multiplied by $(\Sigma R \pm \delta) / \Sigma R$, finally resulting in a desired
- 30 white shift. The direction of the color vector for Red will get a small deviation that is determined by the amount of white shift only.

The fourth possibility, again using a RISC core, concerns the adjustment of all matrix parameters proportionally to each other in order to adapt the signal amplitude of the matrix circuit to a more unity value. Select first a Boolean B3 that makes clear that all parameters have to be changed proportionally. Then select one of the ΣR , ΣG or ΣB matrix row sums. Vary this matrix row sum by $\pm\delta$. Next all matrix parameters will be multiplied by $(\Sigma X \pm \delta) / \Sigma X$, where ΣX corresponds with the selected ΣR , ΣG or ΣB matrix row sum. Thereafter, the new ΣR , ΣG and ΣB matrix row sums are calculated again. The color as well as the white reproduction will be maintained, only the signal amplitudes will be changed.

The following conclusions can be drawn. Using all proposed possibilities will help to adjust the matrix much easier then when using only the first possibility. All mentioned adjustment possibilities have been realized with a PC and a menu for the selection of the matrix parameters a11 to a33, ΣR , ΣG or ΣB and two Boolean, one for white maintenance and one for amplitude adjustment.

A primary aspect of the invention can be summarized as follows. Besides the theoretical calculation of the matrix for color correction, also a manual adjustment for further fine-tuning or as a check with several pictures is required. Tuning the color matrix of a camera to a desired color reproduction means however that nine parameters have to adjusted. A specific problem with such a matrix is that if one parameter, in for instance the red matrix, is changed that besides the red also the white reproduction changes. By maintaining the white reproduction with the aid of the calculation power of the RISC core (Reduced Instruction Set Computer) of the camera it has become much easier to adjust the matrix to the desired color reproduction. Moreover it is also possible to change directly the white reproduction. The deviation of the color reproduction will then be determined by the deviation of the white reproduction only.

The following features are especially noteworthy. The possibility of maintaining the white reproduction when changing one of the selected matrix parameters a11 to a33. Changing the white reproduction by selection of ΣR , ΣG or ΣB with maintenance of the matrix ratio of each color and with a color shift that is only determined by the amount of white shift. The proportional adaptation of the signal amplitudes by changing all matrix parameters proportionally to each other by selecting an amplitude Boolean and ΣR , ΣG or ΣB . The use of a computing processor like a RISC core for the previously mentioned features.

The drawing shows an embodiment of a color camera in accordance with the present invention. A sensor S supplies three input color signals R_i , B_i and G_i . A matrix adjustment device VAC, CC, AAC receiving these input color signals R_i , B_i and G_i comprises
5 a value adjustment circuit VAC for adjusting a color matrix related value which may be one of the nine matrix parameters $a_{11} \dots a_{33}$ or one of the three matrix row sums ΣR , ΣG or ΣB . A control circuit CC comprises three buttons B_1 , B_2 , B_3 to switch on or off the three above-mentioned Booleans B_1 , B_2 or B_3 , respectively. An automatic adapting circuit AAC adapts the matrix parameters as described above with regard to the four above-mentioned
10 possibilities, and supplies the output color signals R_o , G_o and B_o .

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any
15 reference signs placed between parentheses shall not be construed as limiting the claim. The word "comprising" does not exclude the presence of other elements or steps than those listed in a claim. The invention can be implemented by means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In the device claim enumerating several means, several of these means can be embodied by one and the same item
20 of hardware.

CLAIMS:

1. A color signal matrix adjustment method, comprising:

adjusting (VAC) a single first color signal matrix related value to obtain a color signal matrix adjustment; and

5 automatically adapting (AAC) at least two color signal matrix parameters other than said single first color signal matrix related value in dependence upon said color signal matrix parameter adjustment.

10 2. A method as claimed in claim 1, wherein said single first color signal matrix related value is a first color signal matrix parameter corresponding to a first color, said color signal matrix adjustment is an increase of said first color signal matrix parameter by an amount δ to change a reproduction of said first color, and said automatically adapting step includes multiplying all color matrix parameters corresponding to colors other than said first color by a factor $(\Sigma X + \delta) / \Sigma X$, in which ΣX is a sum of color signal matrix parameters corresponding to said first color, to maintain a white reproduction to a large extent.

15 3. A method as claimed in claim 1, wherein said single first color signal matrix related value is a sum ΣX of color signal matrix parameters corresponding to a first color, said color signal matrix adjustment is an increase of said sum ΣX of color signal matrix parameters by an amount δ to change a reproduction of both said first color and white, and said
20 automatically adapting step includes multiplying all color matrix parameters corresponding to said first color by a factor $(\Sigma X + \delta) / \Sigma X$ to maintain a ratio between said color matrix parameters corresponding to said first color.


4. A method as claimed in claim 1, wherein said single first color signal matrix related value is a sum ΣX of color signal matrix parameters corresponding to a first color, said color signal matrix adjustment is an increase of said sum ΣX of color signal matrix parameters by an amount δ to change color signal amplitudes, and said automatically adapting step
- 5 includes multiplying all color matrix parameters by a factor $(\Sigma X + \delta) / \Sigma X$ to maintain a reproduction of both said first color and white.
5. A color signal matrix adjustment device (AAC, VAC, CC), comprising:
means (VAC) for adjusting a single first color signal matrix related value to
- 10 obtain a color signal matrix adjustment; and
means (AAC) for automatically adapting at least two color signal matrix parameters other than said single first color signal matrix related value in dependence upon said color signal matrix parameter adjustment.
- 15 6. A color camera, comprising:
a color sensor (S) for producing input color signals (Ri, Gi, Bi); and
a color signal matrix adjustment device (AAC, VAC, CC) as claimed in claim 5 for adjusting said input color signals (Ri, Gi, Bi) to obtain output color signals (Ro, Go, Bo).

ABSTRACT:

In a color signal matrix adjustment method, a single first color signal matrix related value is adjusted (VAC) to obtain a color signal matrix adjustment, and at least two color signal matrix parameters other than the single first color signal matrix related value are automatically adapted (AAC) in dependence upon the color signal matrix parameter

5 adjustment.

PHN 17.061
06.05.1999
8

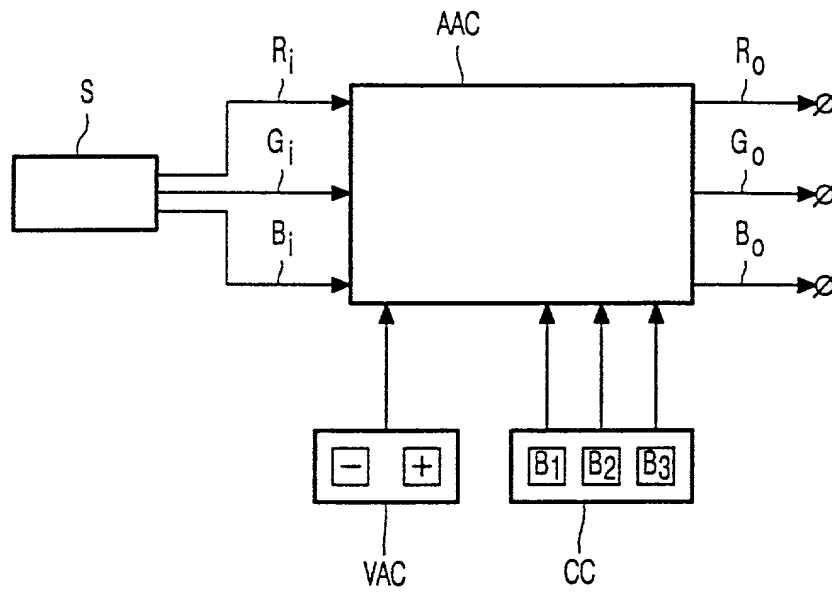

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Atty. Docket

CORNELIS A.M. JASPERS

PHN 17,061

Serial No.

Group Art Unit:

Filed: CONCURRENTLY

Examiner:

COLOR SIGNAL MATRIX ADJUSTMENT

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

APPOINTMENT OF ASSOCIATES

Sir:

The undersigned Attorney of Record hereby revokes all prior appointments (if any) of Associate Attorney(s) or Agent(s) in the above-captioned case and appoints:


BRIAN J. WIEGHAUS

(Registration No. 32,603)

c/o U.S. PHILIPS CORPORATION, Intellectual Property Department, 580 White Plains Road, Tarrytown, New York 10591, his Associate Attorney(s)/Agent(s) with all the usual powers to prosecute the above-identified application and any division or continuation thereof, to make alterations and amendments therein, and to transact all business in the Patent and Trademark Office connected therewith.

ALL CORRESPONDENCE CONCERNING THIS APPLICATION AND THE LETTERS PATENT WHEN GRANTED SHOULD BE ADDRESSED TO THE UNDERSIGNED ATTORNEY OF RECORD.

Respectfully,

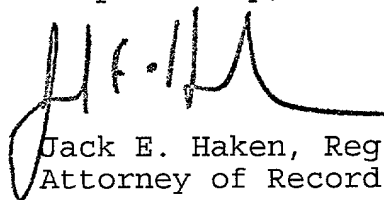

Jack E. Haken, Reg. 26,902
Attorney of Record

Dated at Tarrytown, New York
this 5TH day of AUGUST, 1999
C:\NEWAPPS\APPASOC.WI

DECLARATION and POWER OF ATTORNEY

ATTORNEY'S DOCKET NO.:
PHN 17.061

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
"Color signal matrix adjustment"

the specification of which (check one)

☐ is attached hereto.

☐ was filed on _____ as Application Serial No. _____ and was amended on _____ (if

applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by the amendment(s) referred to above.

I acknowledge the duty to disclose information which is material to patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

COUNTRY	APP. NUMBER	DATE OF FILING (DATE, MONTH, YEAR)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Europe	98202727.8	14 August 1998	YES

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

PRIOR UNITED STATES APPLICATION(S)

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (PATENTED, PENDING, ABANDONED)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Algy Tamoshunas, Reg. No. 27,677
Jack E. Haken, Reg. No. 26,902

SEND CORRESPONDENCE TO: Corporate Patent Counsel; U.S. Philips Corporation; 580 white Plains Road; Tarrytown, NY 10591	DIRECT TELEPHONE CALLS TO: (name and telephone No.) (914) 332-0222
------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------

Dated:		Inventor's Signature:	
Full Name of in Inventor	Last Name JASPERS	First Name Cornelis	Middle Name A.M.
Residence & Citizenship	City Eindhoven	State of Foreign Country The Netherlands	Country of Citizenship The Netherlands
Post Office Address	Street Prof. Holstlaan 6	City 5656 AA Eindhoven	State of Country The Netherlands
			Zip Code